

BV2FBAWMN SERİSİ SU VE HAVA 2 YOLLU TAM GEÇİŞLİ MADENCİLİK KÜRESEL VANALARI (BSP – Rd)

BV2FBAWMN Serisi Su ve Hava 2 Yollu Tam Geçişli Madencilik Küresel Vanalar, akışkanın açma ve kısılmasında kullanılırlar. Kolayca açılıp kapanabilmeleri akışkan geçişinin rahat olmasını sağlar. Volumetrik yapılarından dolayı hızlı ve verimli çalışırlar ve akışkanda oluşabilecek kavitasyonları engellerler. İstenildiğinde kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitlenebilirler. BV2FBAWMN Serisi Su ve Hava 2 Yollu Tam Geçişli Madencilik Küresel Vanalarda içteki küre malzemesi piringten olup, sert krom ile kaplanmıştır. BV2FBAWMN Serisi Su ve Hava 2 Yollu Tam Geçişli Madencilik Küresel Vanalar, madencilik sektöründe su ve hava hatlarında kullanılırlar.

Gövde Malzemesi

Küre Malzemesi

Vida Ölçüsü

Küre Yataklaması

Sızdırmazlık

Çalışma Sıcaklığı

Kaplama

Kullanım Alanı

Otomat Çeliği

Sert Krom Kaplı – Piring

BSP – Rd (Yuvarlak diş)

Özel sızdırmazlık elemanı

Nitril O-ring (NBR)

-30 °C ile +110 °C

Galvaniz (Chrome III pasivasyon)

Su ve Hava hatlarının bulunduğu madencilik sektörü uygulamalarında



BV2FBAWMN SERIES 2 WAY FULL BORE MINING BALL VALVES (WATER & AIR APPLICATIONS) (BSP – Rd)

BV2FBAWMN Series 2-Way Full Bore Mining Ball Valves (Water & Air Applications) are used to either shut-off or open of flow passage and their easy operation provides unrestricted flow. Due to their volumetric structure they work rapidly and efficiently, and prevent cavitation.

BV2FBAWMN Series 2-Way Full Bore Mining Ball Valves (Water & Air Applications) can be locked in the open or closed position through locking washer on the circle pin. Internal ball is hard chrome coated brass.

BV2FBAWMN Series 2-Way Full Bore Mining Ball Valves (Water & Air Applications) are suitable for water and air applications in mining sector.

Body Material

Ball Material

Thread Size

Ball Seats

Sealing

Working Temperature

Plating

Applications

Carbon steel

Hard chrome coated brass

BSP – Rd (Round Thread)

Special sealing equipments


Nitrile O-ring (NBR)

-30 °C and +110 °C

Zinc Plating (Cr III Passivation)

Mining sector applications including water and air lines references



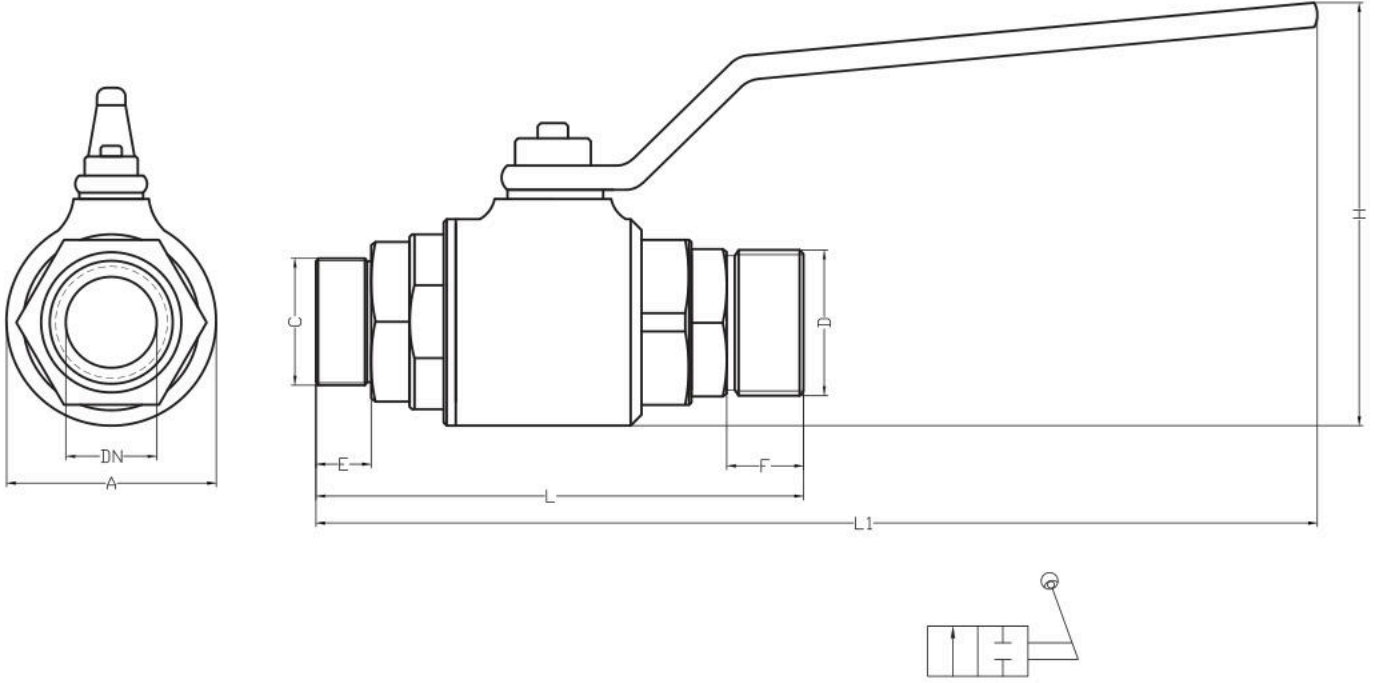

Teknik Özellikler Technical Specifications

Kod (Code)	Akış Ölçüsü (Diameter) DN	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)								
			A	B	C	D	E	F	G	L	L1
BV2FBAWMNG2RD62DN40N	40	-	-	-	2" BSP	Rd62x1/6"	-	-	-	-	-
BV2FBAWMNG2RD75DN40N	40	180	-	-	2" BSP	Rd75x1/6"	26	39	-	246	374

