



BV2MH SERİSİ HİDROLİK 2 YOLLU KÜRESEL VANALAR (MONTAJ DELİKLİ GÖVDE)

BV2MH Serisi Hidrolik 2 Yollu Küresel Vanalar (Montaj Delikli Gövde), akışkanın açma ve kısılmasında kullanılırlar. Kolayca açılıp kapanabilmeleri akışkan geçişinin rahat olmasını sağlar. Volumetrik yapılarından dolayı hızlı ve verimli çalışırlar ve akışkanda oluşabilecek kavitasyonları engellerler. İstenildiğinde kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitlenebilirler. BV2MH Serisi Hidrolik 2 Yollu Küresel Vanalar (Montaj Delikli Gövde) içteki küre çelik olup, sert kromla kaplanmış ve delrinle (POM) yataklandırılmıştır. BV2 Serisi Hidrolik 2 Yollu Küresel Vanalar hidrolik ve diğer sanayi yağlarının yanı sıra akaryakıt, LPG, CNG ve diğer gaz geçişlerinde de kullanılırlar. BV2MH Serisi Hidrolik 2 Yollu Küresel Vanalar (Montaj Delikli Gövde) gövde üzerindeki 2 montaj deliği sayesinde uygulama yerinde sabitleme ve kolay bağlama imkânı sağlar.

Gövde Malzemesi

Küre Malzemesi

Vida Ölçüsü

Küre Yataklaması

Sızdırmazlık

Çalışma Sıcaklığı

Kaplama

Özel Hallerde

Kullanım Alanı

Otomat Çeliği

Sert Krom Kaplı Çelik

BSP, NPT

Delrin (POM)

Nitril O-ring (NBR)

-30 °C ile +110 °C

Galvaniz (Chrome III pasivasyon)

VİTON (-30 °C - +225 °C)

Kazı makineleri, plastik baskı kalıp makineleri, kimyasal üretim tesisleri, vinçler, kamyonlar ve genel hidrolik uygulamalar.



BV2MH SERIES HYDRAULIC 2 WAY BALL VALVES (WITH MOUNTING HOLES)

BV2MH Series Hydraulic 2 Way Ball Valves (With Mounting Holes) are used to either shut-off or open of flow passage and their easy operation provides unrestricted flow. Due to their volumetric structure they work rapidly and efficiently, and prevent cavitation. BV2MH Series Hydraulic 2 Way Ball Valves (With Mounting Holes) can be locked in the open or closed position through locking washer on the circle pin. Internal ball is hard chrome coated steel and delrin (POM) seated. Ball Valves are suitable for LPG, CNG and other gas applications, as well as hydraulic and other industrial fluids. BV2MH Series Hydraulic 2-Way Ball Valves (with Mounting Holes) provide fixation at the application place and easy connection with the help of 2 mounting holes on the body.

Body Material

Ball Material

Thread Size

Ball Seats

Sealing

Working Temperature

Plating

Upon Request

Applications

Carbon steel

Hard chrome coated carbon steel.

BSP, NPT

Delrin (POM)

Nitrile O-ring (NBR)




-30 °C and +110 °C

Zinc Plating (Cr III Passivation)

VITON (-30 °C - +225 °C)

Excavators, plastic injection mould machines, chemical processing plants, cranes, tankers, dump trucks and general hydraulic applications



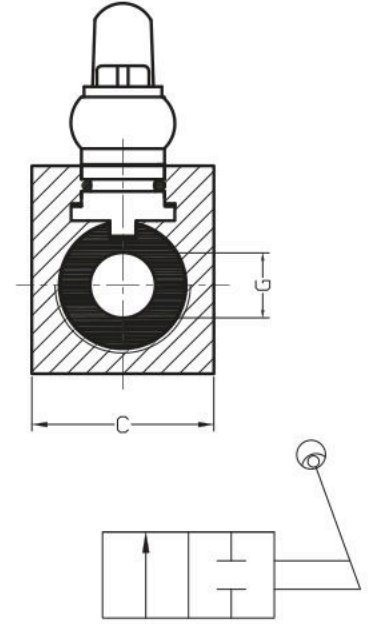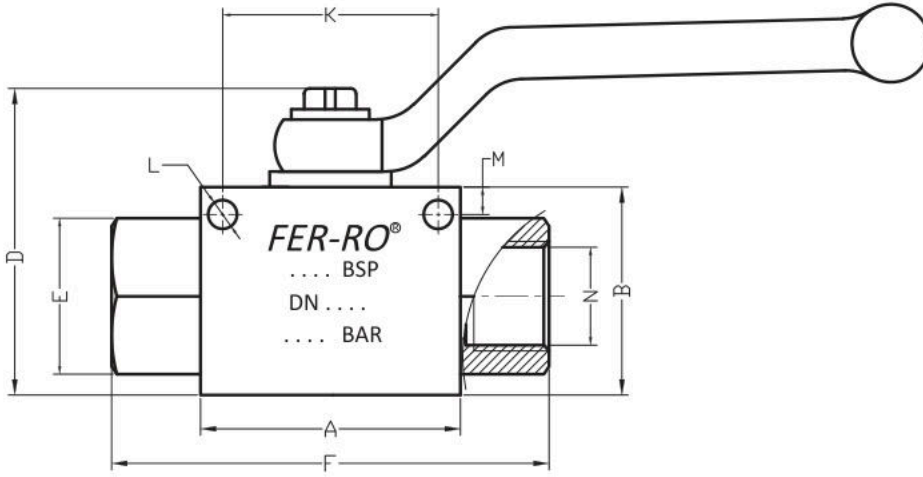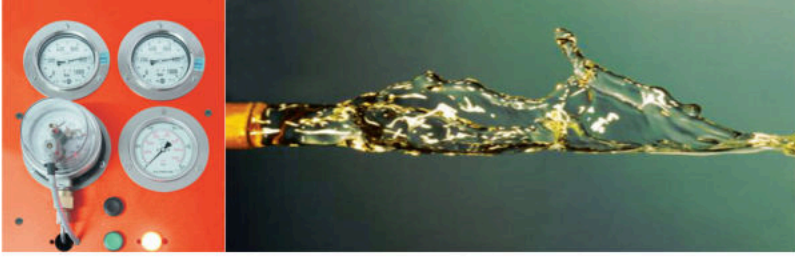

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) N	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)								
			A	B	C	D	E	F	G	L	M
BV2MHG14N	1/4" BSP	500	45	35	30	77	142	24	48	75	DN 10
BV2MHG38N	3/8" BSP	500	45	35	30	77	142	24	48	75	DN 10
BV2MHG12N	1/2" BSP	500	50	40	35	82	147	30	53.50	84	DN 13
BV2MHG58N	5/8" BSP	450	56	45	40	87	150	34	58.50	94	DN 16
BV2MHG34N	3/4" BSP	400	60	55	45	111	221	38	73	96	DN 20
BV2MHG1N	1" BSP	400	70	60	55	116	235	46	78	118	DN 25
BV2MHG114N	1 1/4" BSP	380	70	60	55	116	235	50	78	134	DN 25
BV2MHG112N	1 1/2" BSP	380	70	60	55	116	235	55	78	140	DN 25

