



FC3W SERİSİ HAT TİPİ BASINÇ DUYARLI 3 YOLLU ÇEKSİZ HIZ AYAR VALFLERİ

FC3W serisi hat tipi basınç duyarlı 3 yollu çeksiz hız ayar valfleri E portundan giren akışkanın hızını hız ayar valfi sayesinde ayarlayarak P portuna gönderilmesini sağlar sistemde oluşan basınç ve debi değişimlerini içerisinde bulunan hidrostatik denge pistonu sayesinde S portundan boşaltarak P portunda akışkanın basıncını ve debisini stabilize eder.

Malzeme
Vida Ölçüsü
Sızdırmazlık
Çalışma Sıcaklığı
Kullanım Alanı

Alüminyum
BSP (İsteğe Bağlı: NPT, Metrik)
Nitril O-ring (NBR)
-30 °C ile +110 °C
Genel hidrolik uygulamaları






FC3W SERIES LINE TYPE PRESSURE SENSITIVE 3-WAY FLOW CONTROL VALVES (WITHOUT CHECK)

FC3W series line type pressure sensitive 3-way flow control valves without check adjust the speed of the fluid entering port E through the flow control valve and allow it to be sent to port P by discharging the pressure and flow rates formed in the system from port S tanks to the hydrostatic balance piston located in it and stabilizing the pressure and flow of the fluid in port P.

Material
Thread Size
Sealing
Working Temperature
Applications

Aluminium
BSP (Upon Request: NPT, Metric)
Nitrile O-ring (NBR)
-30 °C and +110 °C
General hydraulic applications




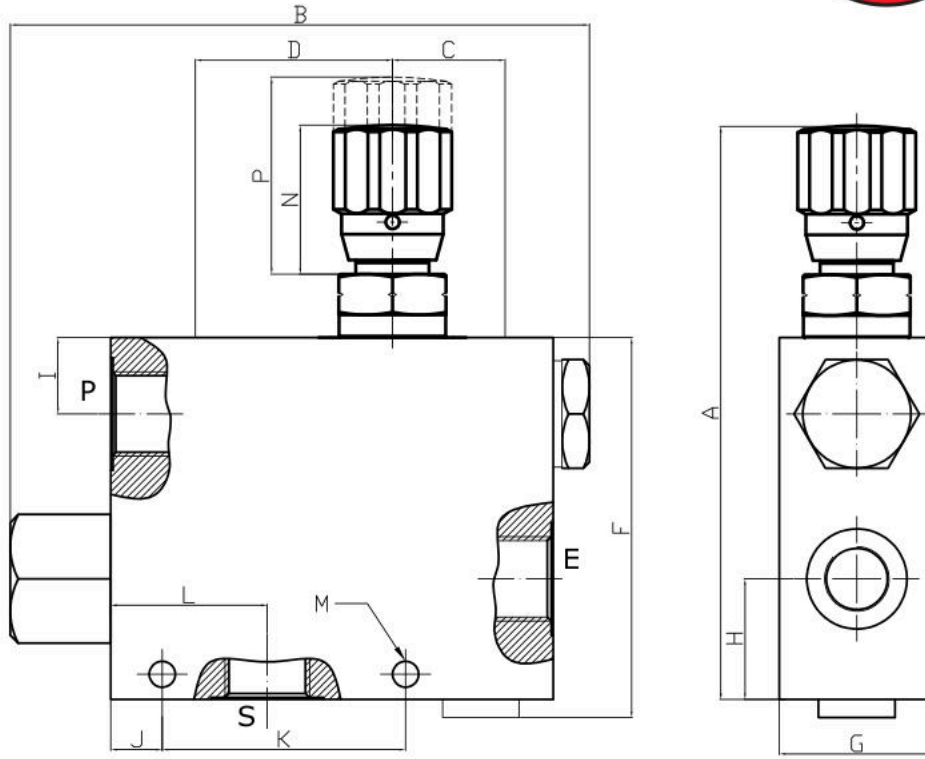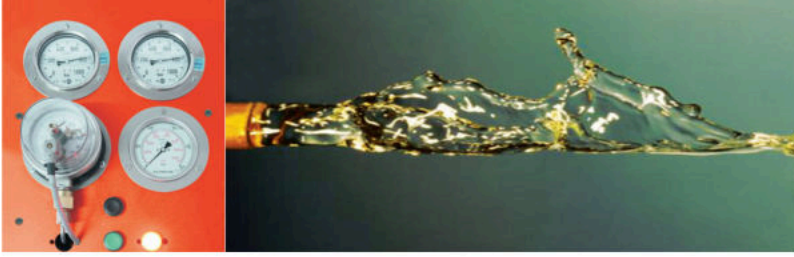

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) P-S-E	Çalışma Basıncı (Working Pressure) Bar	E - PORT Max. Yağ Akışı (Max. Flow) Lt/Min	P - PORT Max. Yağ Akışı (Max. Flow) Lt/Min	Ölçüler - mm (Dimensions - mm)												
					A Max	B	C	D	F	G	H	J	K	L	M	N	P
FC3WPSG38N	3/8" BSP	210	55	30	166	151	40	70	93	38.50	29	12.75	57.25	39	Ø6.50	44	60.50
FC3WPSG12N	1/2" BSP	210	90	55	166	151	40	70	93	38.50	29	12.75	57.25	39	Ø6.50	44	60.50
FC3WPSG34N	3/4" BSP	210	120	100	-	-	-	-	-	-	-	-	-	-	-	-	-

3/8"

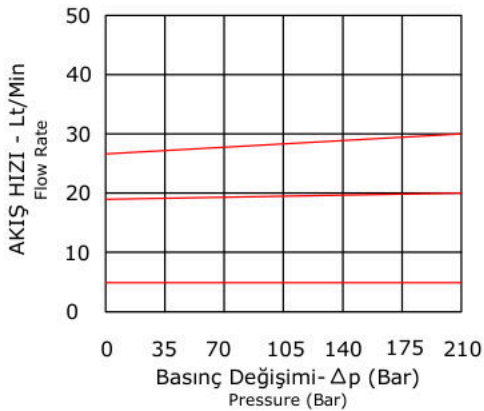

1/2"

