



Ön Yükleyci Kumanda Kolu ile Kullanıma Uygundur.
Suitable For Use With Front Loader Valve .



MCFFH SERİSİ HİDROLİK DÜZ ALINLI YATIK TİP ÇOKLU BAĞLANTI KAPLINLERİ

MCFFH serisi Hidrolik Basınç Altında Çıkarılabilen Düz Alınlı Çoklu Bağlantı Kaplinleri aynı anda birden fazla kaplinin tek seferde kolay ve hızlı bağlanmasına olanak sağlar. Devrelerin yerlerinin karışmamasını sağladığı gibi kilit mekanizması da istem dışı açılmaları engeller.



Uyumluluk	ISO 16028
Valf Sistemi	Düz Alınlı
Malzeme (Gövde)	Alüminyum
Malzeme (Otomatik Rekorlar)	Otomat Çeliği
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Isıl İşlem	Erkek Uç
Takma Sistemi	Kaldıraç kol vasıtasıyla
Çıkarma Sistemi	Kaldıraç kol vasıtasıyla
Kitleme Sistemi	PIN, CAM
Basınç Altında Takılabilme	Yapılamaz
Basınç Altında Çıkarılabilme	Yapılamaz
Özel Hallerde	VİTON & Isıya dayanıklı özel yay (-30 °C ile +225 °C), Poliüretan (PU)
Kullanım Alanı	İnşaat, üretim, savunma, havacılık, mobil hidrolik, kimya, medikal, madencilik

MCFFH SERIES HYDRAULIC FLAT FACE HORIZONTAL MULTI COUPLINGS

MCFFH series Hydraulic Disconnect Under Pressure Flat Face Multi Couplings allow for easy and fast connection of multiple couplings at once. The lock mechanism prevents unintentional opening as it ensures that the circuits do not interfere.

Interchangeability	ISO 16028
Shut-off System	Flat Valve
Material (Body)	Aluminium
Material (Quick Couplings)	Carbon Steel
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Heat Treatment	Male nipple
Connection System	Lever
Disconnection System	Lever
Locking System	PIN, CAM
Connection Under Pressure	Not Allowed
Disconnection Under Pressure	Not Allowed
Upon Request	VITON & High temperature resistant special spring (-30 °C & +225 °C), Polyurethane (PU)
Applications	Construction, production, national defense, aviation, mobile, hydraulic, chemical, mining



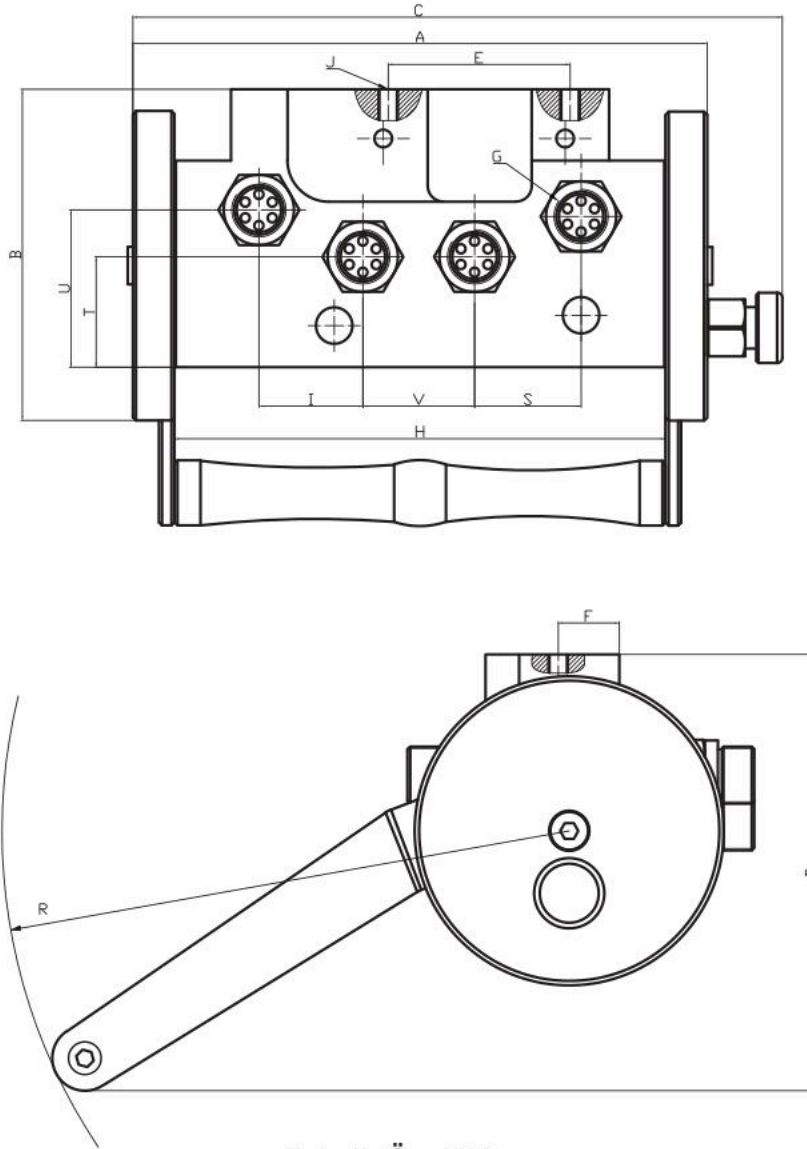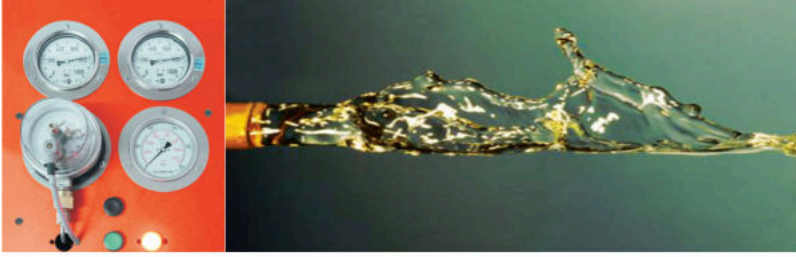

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) G	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)													
			A	B	C	D	E	F	H	I	J	V	S	T	U	R
MCFFHG38SN4P	3/8" BSP	350	221	127.50	249.50	168	70	23.50	189	40	M8x1.25	43	41	42.50	60.50	437
MCFFHG12SN4P	1/2" BSP	350	221	127.50	249.50	168	70	23.50	189	40	M8x1.25	43	41	42.50	60.50	437
MCFFHM2215SN4P	M22x1.5 15L	350	221	127.50	249.50	168	70	23.50	189	40	M8x1.25	43	41	42.50	60.50	437
MCFFHG34SN4P	3/4" BSP	350	221	127.50	249.50	168	70	23.50	189	40	M8x1.25	43	41	42.50	60.50	437

