



MFCC SERİSİ NG06 MODÜLER ÇEKİLİ HIZ AYAR VALFİ

NG06 Modüler çekili hız ayar valfleri akışkanın hızının bir yönde ayarlanmasını diğer yönde de çekvalfi açarak rahatça geçişini sağlayan valflerdir. NG06 Modüler Hız Ayar Valfleri pleyt üzerine bağlantı ile diğer valflerle uyumlu çalışmaktadır. Montaj yüzeyi NG06'dır. NG06 Modüler çekili hız ayar valfleri mobil ve diğer sanayi alanlarında geniş kapsamda kullanılmaktadır.

Malzeme
Bağlantı Şekli
Sızdırmazlık
Çalışma Sıcaklığı
Kullanım Alanı

Alüminyum
NG06 Bağlantılı
Nitril O-ring (NBR)
-30 °C ile +110 °C
Genel hidrolik uygulamaları




MFCC SERIES NG06 MODULAR FLOW CONTROL VALVES (WITH CHECK)

NG06 Modular Flow Control Valves (with check) are valves that allow the fluid speed to be adjusted in one direction and pass comfortably by opening the check valve in the other direction. NG06 Modular Flow Control Valves are compatible with other valves by connecting to the subplates. Mounting surface is NG06. NG06 Modular Flow Control Valves (with check) are widely used in mobile and other industrial areas.

Material
Connection Type
Sealing
Working Temperature
Applications

Aluminium
NG06 Connection
Nitrile O-ring (NBR)
-30 °C and +110 °C
General Hydraulic Applications



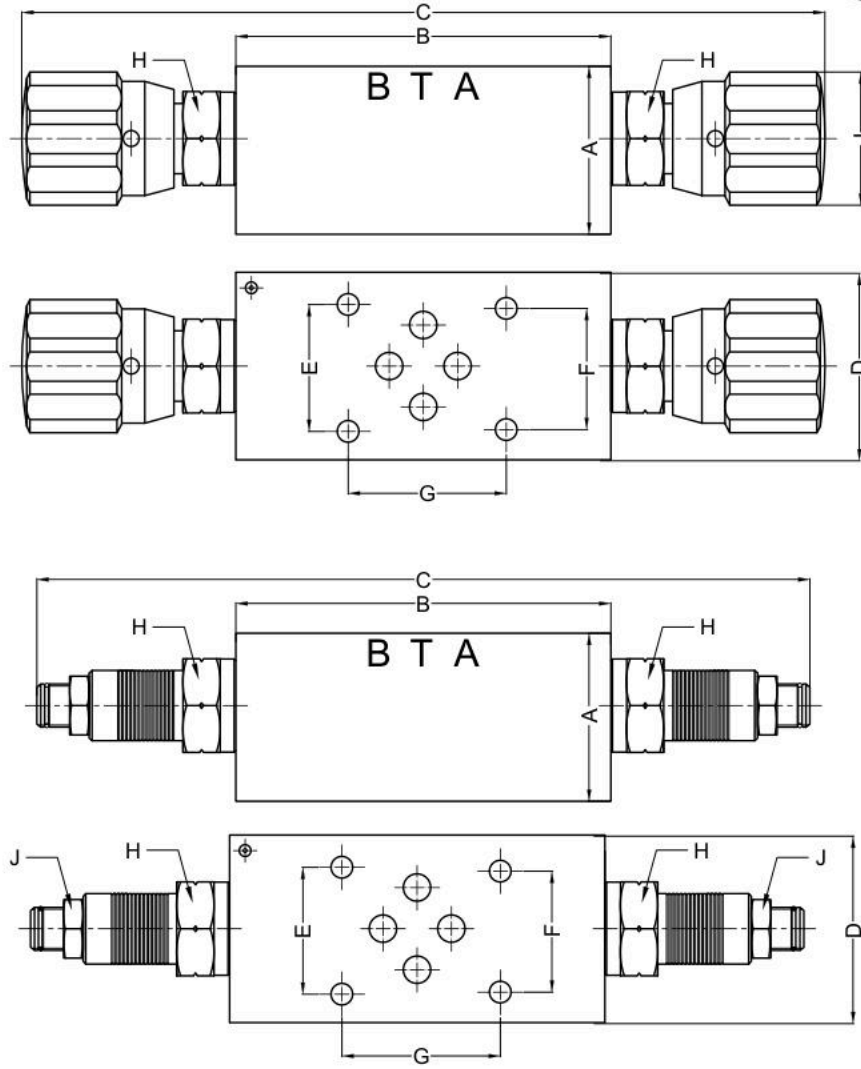

Teknik Özellikler Technical Specifications

Kod (Code)	Bağlantı Ölçüsü (Connection Type)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min)	Ölçüler - mm (Dimensions - mm)								
				A	B	C	D	E	F	G	H	J
MFCCKNNG06N	NG06	350	40	43	96	223	48	32.5	31	40.5	AA24	Ø32
MFCCSHNG06N	NG06	350	40	43	96	222	48	32.5	31	40.5	AA24	AA15

