



NZ SERİSİ PASLANMAZ DÜZ JET PÜSKÜRTME NOZUL

NZ serisi paslanmaz düz jet püskürtme nozullar, genel amaçlı yıkama sistemlerinde güvenle kullanılmaktadır. Farklı basınç yelpazesinde kullanılmaktadır. Özel çekirdek tasarımı sayesinde basınç pompasına zarar vermeyen yapıya sahiptir. Yüksek kaliteli hammadde kullanıldığı için uzun ömürlüdür.



Malzeme

Paslanmaz Çelik Gövde - Sertleştirilmiş paslanmaz çelik çekirdek.

Kaplama

Paslanmaz Çelik pasivasyonu (isteğe bağlı olarak)

Çalışma Sıcaklığı

0 °C ile +80 °C (isteğe bağlı olarak artırılabilir)

Kullanım Alanları

Yüksek basınçlı yıkama makineleri, otomatik sistem yıkama tesisleri, tank yıkama sistemleri, zemin ve yüzey temizleme sistemleri.

NZ SERIES STAINLESS STEEL FLAT FAN NOZZLE

NZ series stainless steel flat fan nozzles have variety of reliable applications in washing machines. Different pressure portfolio is an advantage. Thanks to the special insert design, there will be no negative effect to the water pump. Long life time because of the high grade materials.



Material

Stainless steel body, hardened stainless steel insert

Plating

Passivation upon request of application

Working Temperature

0 °C - +80 °C (Can be increased upon request)

Applications

High pressure washing machines, full automatic washing machines, tank cleaning machines, floor, wall and related surface cleaning applications.



Not:

Su dışında kullanılacak kimsayallar veya suya ilave edilecek kimyasallar için lütfen danışınız.

Note:

Please refer to us in case of watersoluble chemicals or non water applications.



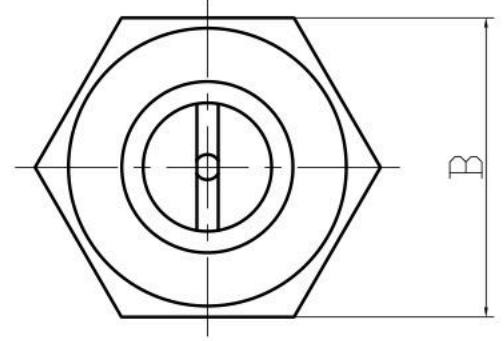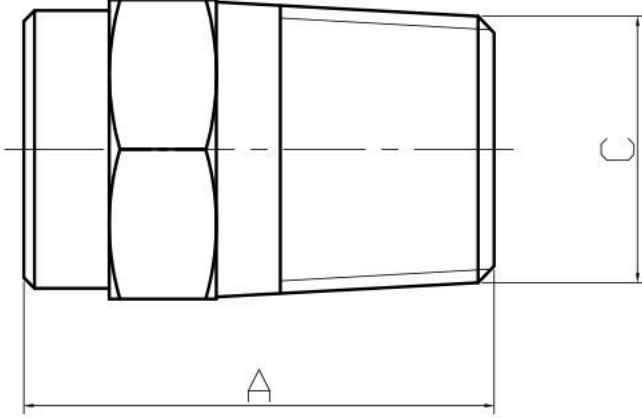

Teknik Özellikler Technical Specifications

Kod (Code)	Boyut / Size (US gal / Min at 40 psi)	Sprey Açısı (Spraying Angle)	Bağlantı (Connector)	Çap (Orifice) mm	Ölçüler - mm (Dimensions - mm)		
					A	B	C
NZSPSFF14020	020	20°	1/4" NPT	0,90	22	14	1/4" NPT
NZSPSFF14025	025	20° - 30°	1/4" NPT	1,00	22	14	1/4" NPT
NZSPSFF14030	030	20° - 30°	1/4" NPT	1,10	22	14	1/4" NPT
NZSPSFF14040	040	30°	1/4" NPT	1,20	22	14	1/4" NPT
NZSPSFF14050	050	30°	1/4" NPT	1,35	22	14	1/4" NPT

Debi / Basınç Değişimi Tablosu Flow Rate / Pressure Drop Table

Kod (Code)	Vida Ölçüsü (Thread Size)	Debi (Flow Rate) - lt / dk (lt/min.)							
		80 Bar/1160 psi	100 Bar/1450 psi	120 Bar/1740 psi	150 Bar/2175 psi	170 Bar/2465 psi	200 Bar/2900 psi	250 Bar/3625 psi	300 Bar/4350 psi
NZSPSFF14020	1/4" NPT	4,1	4,6	5,0	5,6	5,9	6,4	7,2	7,9
NZSPSFF14025	1/4" NPT	5,1	5,7	6,2	7,0	7,4	8,1	9,0	9,9
NZSPSFF14030	1/4" NPT	6,1	6,8	7,5	8,4	8,9	9,7	10,8	11,8
NZSPSFF14040	1/4" NPT	8,2	9,1	10,0	11,2	11,9	12,9	14,4	15,8
NZSPSFF14050	1/4" NPT	10,2	11,4	12,5	14,0	14,9	16,1	18,0	19,7