



QCBR SERİSİ PİRİNÇ OTOMATİK REKORLAR

Gövde malzemesi pirinç olan ve paslanmaz yay ve bilya kullanılarak üretilen QCBR Serisi Otomatik Rekorlar korozyona karşı mükemmel dirence sahiptir. QCBR Serisinde isteğe bağlı içi boş olarak da üretim yapılmaktadır.



Uyumluluk	ISO 7241-A
Valf Sistemi	Pimli
Malzeme	Pirinç
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Takma Sistemi	Yüzük geri çekilerek
Çıkarma Sistemi	Yüzük geri çekilerek
Basınç Altında Takılabilme	Yapılamaz
Basınç Altında Çıkarılabilme	Yapılamaz
Özel Hallerde	VİTON, EPDM (Buhar uygulamalarına özel), Poliüretan (PU), Silikon (MVQ)
Kullanım Alanı	Denizcilik, gıda, ilaç, medikal, kimya, sulama, kağıt, boya, tekstil, gaz, havacılık

QCBR SERIES BRASS QUICK COUPLINGS

QCBR Series Quick Couplings are made of brass material and stainless steel locking balls & springs have an excellent resistance to corrosion. For QCBR Series free flow options is available




Interchangeability	ISO 7241-A
Shut-off System	Poppet Valve
Material	Brass
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Connection System	Pulling back the sleeve
Disconnection System	Pulling back the sleeve
Connection Under Pressure	Not Allowed
Disconnection Under Pressure	Not Allowed
Upon Request	VITON, EPDM (For steam applications), Polyurethane (PU), Silicone (MVQ)
Applications	Marine, food, pharmacy, medical, chemical, irrigation, paper, paint, textile, gas and aviation

Özel hallerde VİTON, EPDM, Poliüretan, Silikon

Upon request VITON, EPDM, Polyurethane, Silicone



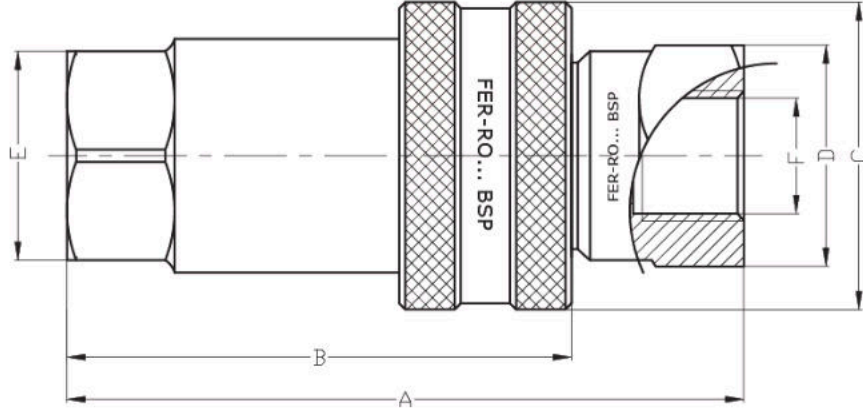

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) F	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm				
			A	B	C	D	E
QCBRG14SN	1/4" BSP	190	74,50	55	30	19	20
QCBRG38SN	3/8" BSP	175	80	60,50	36	22	25
QCBRG12SN	1/2" BSP	160	92,50	68	38	27	27
QCBRG34SN	3/4" BSP	130	110,50	82,50	48	36	34
QCBRG1SN	1" BSP	100	132	110	55	41	41
QCBRG114SN	1 1/4" BSP	80	151	117	69,50	50	50

Debi / Basınç Değişimi Tablosu Flow Rate / Pressure Drop Table

Kod (Code)	Vida Ölçüsü (Thread Size)	Basınç Değişimi (Pressure Drop) - Δ p		
		1 Bar	2 Bar	5 Bar
QCBRG14SN	1/4" BSP	15	22	35
QCBRG38SN	3/8" BSP	25	38	70
QCBRG12SN	1/2" BSP	50	70	135
QCBRG34SN	3/4" BSP	90	150	210
QCBRG1SN	1" BSP	156	210	360
QCBRG114SN	1 1/4" BSP	215	320	580

