



QCSS SERİSİ AISI 316-L PASLANMAZ OTOMATİK REKORLAR

Komple olarak AISI 316-L kalite paslanmaz çelikten imal edilen QCSS Serisi Otomatik Rekorlar her türlü kimyasal ve korozyona karşı mükemmel dirence sahiptir.



Uyumluluk	ISO 7241-A
Valf Sistemi	Pimli
Malzeme	AISI 316-L kalite paslanmaz çelik
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	VITON
Çalışma Sıcaklığı	-30 °C ile +225 °C
Takma Sistemi	Yüzük geri çekilerek
Çıkarma Sistemi	Yüzük geri çekilerek
Basınç Altında Takılabilme	Yapılamaz
Basınç Altında Çıkarılabilme	Yapılamaz
Özel Hallerde	EPDM (Buhar uygulamalarına özel), Poliüretan (PU), Silikon (MVQ) Denizcilik, gıda, ilaç, medikal, kimya, sulama, kağıt, boya, tekstil, gaz, havacılık
Kullanım Alanı	

QCSS SERIES AISI 316-L STAINLESS STEEL QUICK COUPLINGS

QCSS Series Quick Couplings are completely made of AISI 316-L stainless steel material have an excellent resistance to all kind of chemical and corrosion. For QCSS Series provided with VITON sealing material, high temperature resistant special springs are used.




Interchangeability	ISO 7241-A
Shut-Off System	poppet Valve
Material	AISI 316-L Stainless steel
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	VITON
Working Temperature	-30 °C and +225 °C
Connection System	Pulling back the sleeve
Connection Under Pressure	Pulling back the sleeve
Disconnection Under Pressure	Not Allowed
Upon Request	Not Allowed
Applications	EPDM (For steam applications), Polyurethane (PU), Silicone (MVQ) Marine, food, pharmacy, medical, chemical, irrigation, paper, paint, textile, gaz and aviation

Standart: VITON (İstek üzerine: EPDM, Poliüretan, Silikon)

Standard: VITON (Upon request: EPDM, Polyurethane, Silicone)



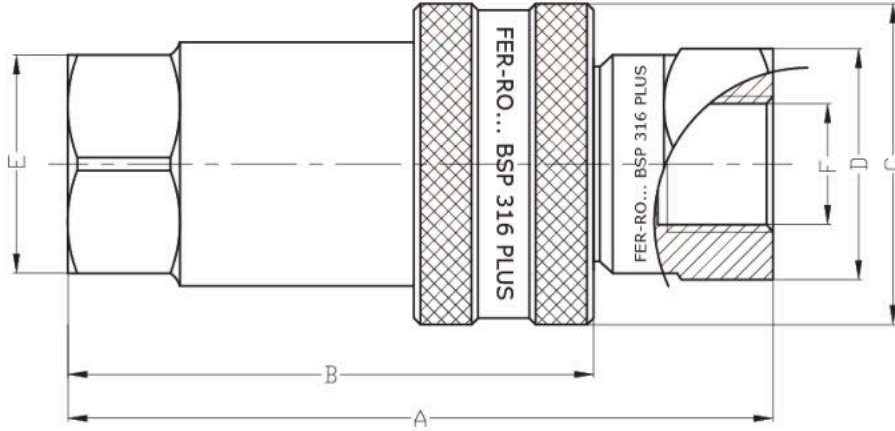

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) F	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm				
			A	B	C	D	E
QCSSG14SV	1/4" BSP	350	74,50	55	30	19	20
QCSSG38SV	3/8" BSP	330	80	60,50	38	22	25
QCSSG12SV	1/2" BSP	320	92,50	68	40	27	27
QCSSG34SV	3/4" BSP	280	110,50	82,50	50	36	34
QCSSG1SV	1" BSP	250	132,50	100	58	41	41

Debi / Basınç Değişimi Tablosu Flow Rate / Pressure Drop Table

Kod (Code)	Vida Ölçüsü (Thread Size)	Basınç Değişimi (Pressure Drop) - Δp		
		1 Bar	2 Bar	5 Bar
QCSSG14SV	1/4" BSP	15	22	35
QCSSG38SV	3/8" BSP	25	34	70
QCSSG12SV	1/2" BSP	50	70	135
QCSSG34SV	3/4" BSP	110	165	210
QCSSG1SV	1" BSP	156	250	360

