



TCSS SERİSİ HİDROLİK PASLANMAZ MANOMETRE TEST REKORLARI

TCSS Serisi Hidrolik Paslanmaz Manometre Test Rekolları sisteme takıldıklarında pimli çekvalf açılarak akışkana doğrudan bağlantı sağlar. Vidalı tasarımları sayesinde sistem çalışırken ve yüksek basınç altındayken bile sisteme bağlanabilirler. Metal toz kapağı tozdan ve hasar görmeden korur. TCSS Serisi Hidrolik Paslanmaz Manometre Test Rekolları AISI 316-L Paslanmaz Çelik Gövdesiyle korozyona karşı mükemmel bir dirence sahiptir.



Valf Sistemi	Pimli
Malzeme	AISI 316 - L Paslanmaz Çelik
Vida Ölçüsü	BSP, UNF & Metrik
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Basınç Altında Takılabilme	Yapılamaz
Basınç Altında Çıkarılabilme	Yapılamaz
Kullanım Alanı	Basınç ölçme, test ve kontrol, yağlama

TCSS SERIES HYDRAULIC STAINLESS STEEL TEST COUPLINGS

The built-in check valve provides direct contact with the fluid, when TCSS Series Hydraulic Stainless Steel Test Couplings are connected. The screw-in design allows test couplings to be connected even when the system is in operation and under high pressure. Internal threaded metal dust cap protects the Test Coupling from contamination and damage. TCSS Series Hydraulic Stainless Steel Test Couplings have an excellent resistance to corrosion with AISI-316 L Stainless Steel body.

Shut-off System	Poppet Valve
Material	AISI 316 - L Stainless Steel
Thread Size	BSP, UNF & Metric
Sealing	Nitrile O-ring (NBR)
Working Temperature	30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Connection Under Pressure	Not Allowed
Disconnection Under Pressure	Not Allowed
Applications	Pressure control & testing, lubrication



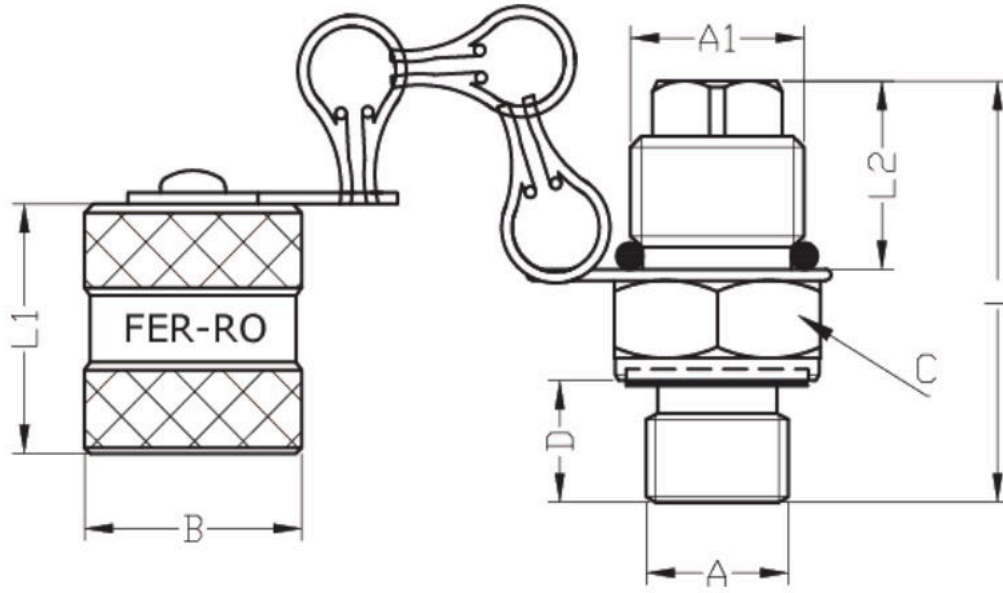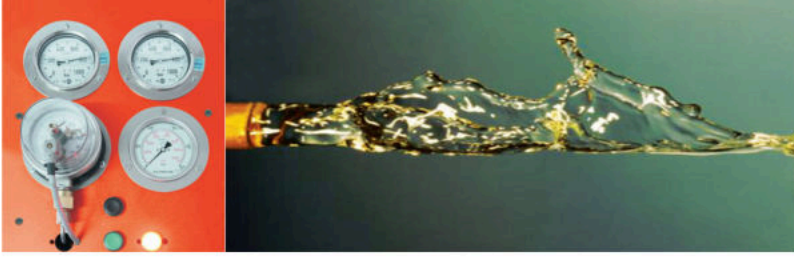

Teknik Özellikler / Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) A	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm						
			A1	B	C	D	L	L1	L2
TCSSM162G18N	1/8" BSP	400	M16 x 2	20	AA17	9	38	22.50	17
TCSSM162G14N	1/4" BSP	630	M16 x 2	20	AA19	11	38	22.50	17
TCSSM162G38N	3/8" BSP	630	M16 x 2	20	AA22	11	38	22.50	17
TCSSM162U516N	5/16" UNF	400	M16 x 2	20	AA17	8	35	22.50	17
TCSSM162U716N	7/16" UNF	630	M16 x 2	20	AA19	11	38	22.50	17
TCSSM162U12N	1/2" UNF	630	M16 x 2	20	AA19	11	38	22.50	17
TCSSM162U916N	9/16" UNF	630	M16 x 2	20	AA22	11	38	22.50	17
TCSSM162M101N	M10 x 1	400	M16 x 2	20	AA17	9	38	22.50	17
TCSSM162M1215N	M12 x 1,5	630	M16 x 2	20	AA19	11	38	22.50	17
TCSSM162M1415N	M14 x 1,5	630	M16 x 2	20	AA19	11	38	22.50	17
TCSSM162M1615N	M16 x 1,5	630	M16 x 2	20	AA22	11	38	22.50	17