

Mechanically Operated Pneumatic Valves

2/2 & 3/2 Way Compact Roller Lever Valve One Way



Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	PUR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air




Other information

For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Order code
	2/2 way spring return normally closed	Poppet	4mm	G1/8	76.025.24.21
	3/2 way spring return normally closed	Poppet	4mm	G1/8	76.026.24.21

Dimensional drawings

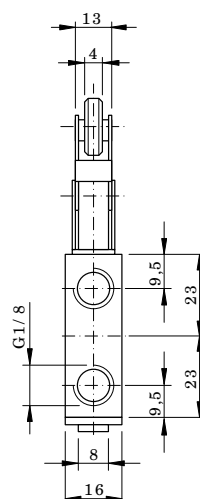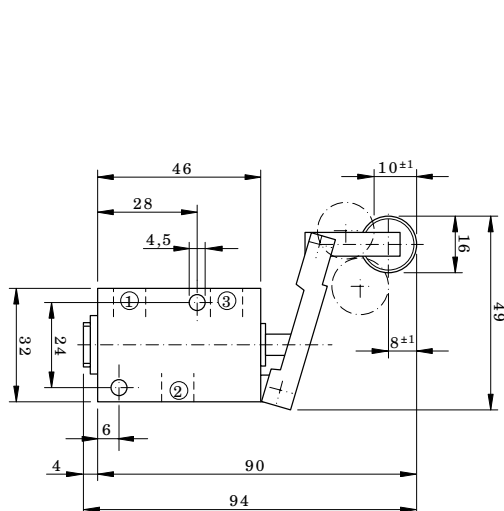

Mechanically Operated Pneumatic Valves

2/2 & 3/2 Way Compact Roller Lever Valve Two Way



Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	PUR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air




Other information


For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Order code
	2/2 way spring return normally closed	Poppet	4mm	G1/8	76.025.23.21
	3/2 way spring return normally closed	Poppet	4mm	G1/8	76.026.23.21

Dimensional drawings

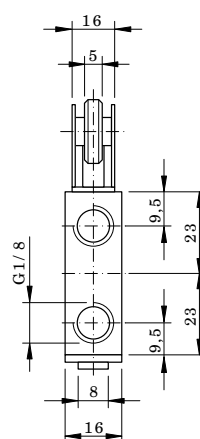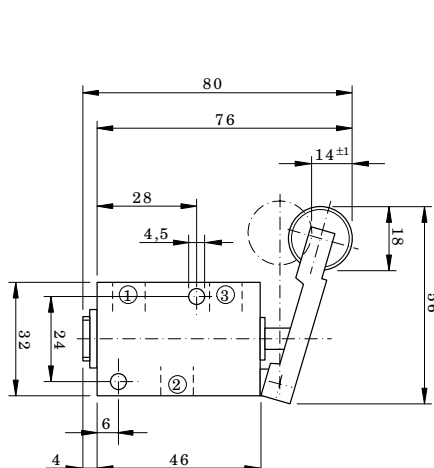



Mechanically Operated Pneumatic Valves

3/2 & 5/2 Way Roller Lever Valve - One Way Roller Function



Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air




Other information

 For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
 For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Order code
	3/2 way spring return normally closed	Spool	6mm	G1/8	76.022.24.21
	5/2 way spring return	Spool	6mm	G1/8	76.023.24.41

Dimensional drawings

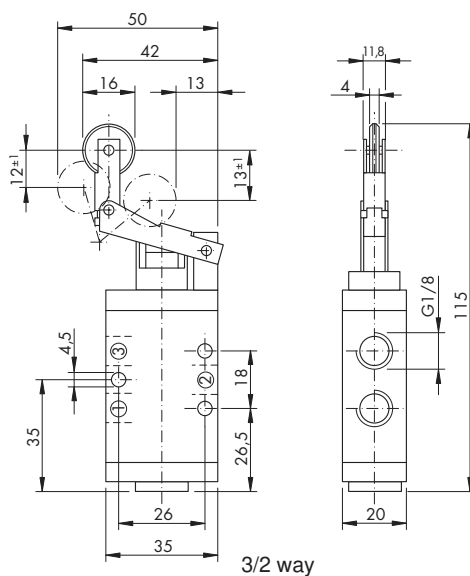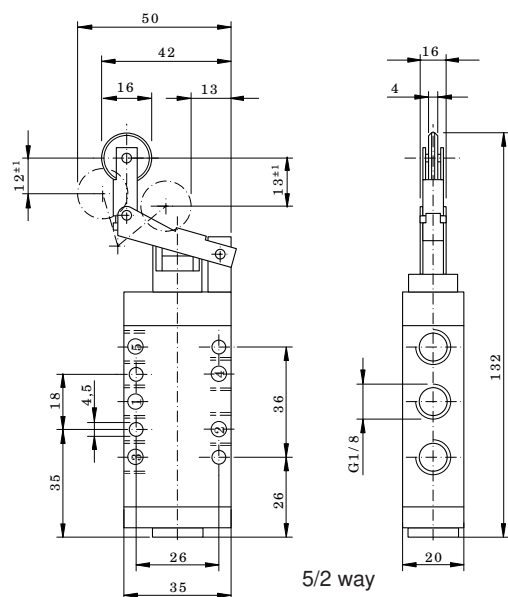

Mechanically Operated Pneumatic Valves

3/2 & 5/2 Way Roller Lever Valve - Two Way Roller Function Air Pilot Assisted

Technical information



Actuation force @ 6 bar:	4N
Pressure range:	2.5-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information




For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Order code
	3/2 way spring return normally closed	Spool	6mm	G1/8	76.022.33.21
	5/2 way spring return	Spool	6mm	G1/8	76.023.33.41

Dimensional drawings

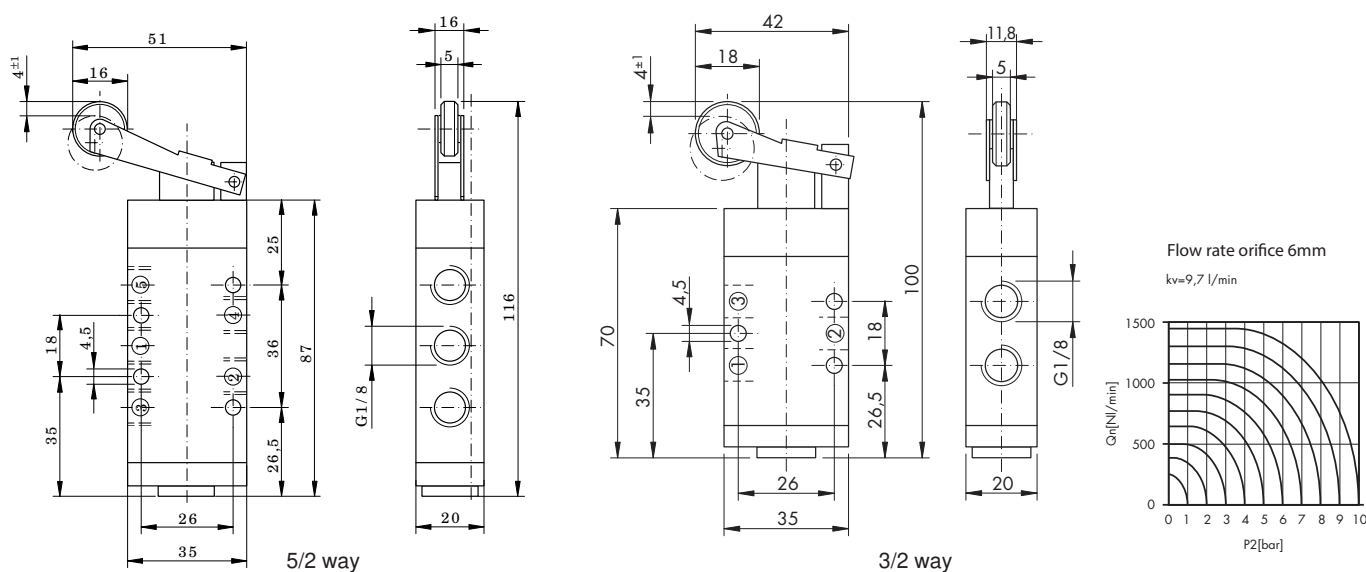

Mechanically Operated Pneumatic Valves

3/2 Way Roller Lever Valve - Two Way Roller Function




Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information





 For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
 For NPT ports use prefix code "75" for example 75.XXX.XX.XX



Symbol	Description	Type	Orifice	Ports	Order code
	3/2 way spring return normally closed	Spool	6mm	G1/8	76.022.23.21
	3/2 way maintained position with pilot return **	Spool	6mm	G1/8	76.022.23.22
	3/2 way with roller on both ends	Spool	6mm	G1/8	76.022.23.10

Dimensional drawings

**Dimensional drawing upon request

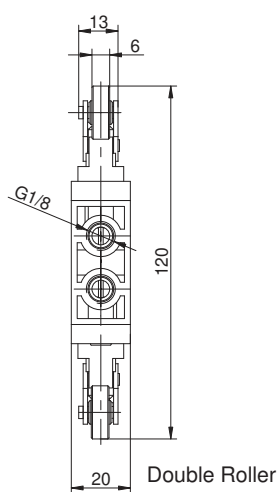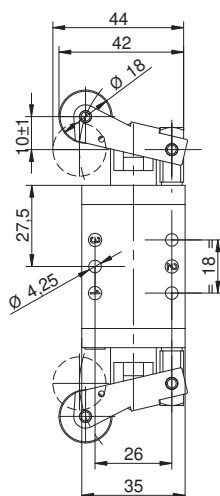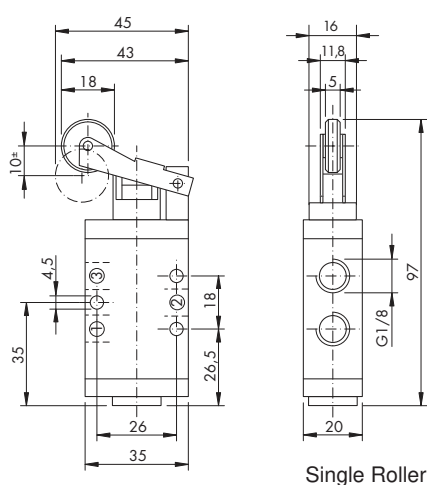

Mechanically Operated Pneumatic Valves

5/2 Way Roller Lever Valve - Two Way Roller Function




Technical information

Pressure range:	0-10 bar
Temperature range:	-15°C...+50°C
Housing:	Die-cast and lacquered zinc alloy
Seals:	NBR
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air

Other information


 For ATEX certification use suffix code "EX" for example 76.XXX.XX.XX.EX
 For NPT ports use prefix code "75" for example 75.XXX.XX.XX




Symbol	Description	Type	Orifice	Ports	Order code
	5/2 way spring return	Spool	6mm	G1/8	76.023.23.41
	5/2 way maintained position with pilot return **	Spool	6mm	G1/8	76.023.23.42
	5/2 way with roller on both ends	Spool	6mm	G1/8	76.023.23.10

Dimensional drawings

**Dimensional drawing upon request

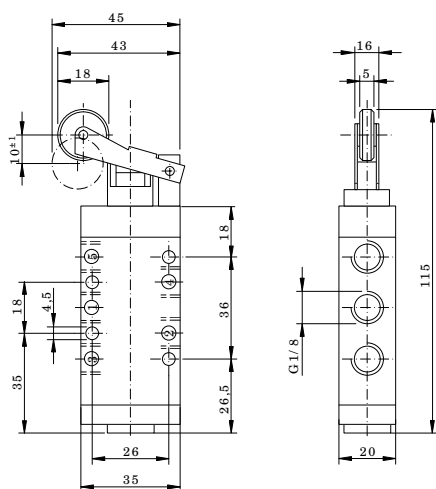

Single Roller

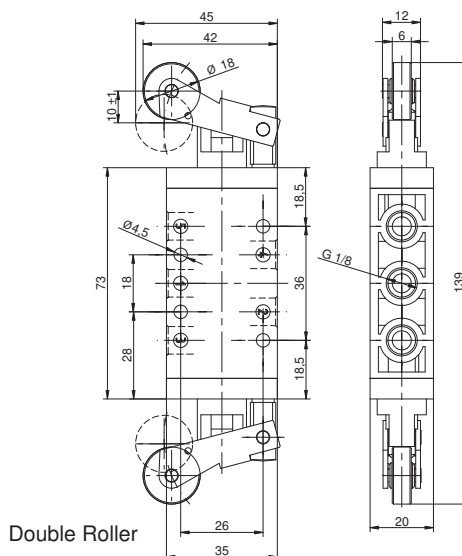

Double Roller

