



QCHT SERİSİ YÜKSEK TEKNOLOJİK ÜRÜNLER İÇİN ÖZEL AMAÇLI ALÜMİNYUM OTOMATİK REKOR

QCHT serisi Fer-ro Yüksek Teknolojik Ürünler için Özel Amaçlı Yüksek Nitelikli alüminyum malzemeden üretilmiş olan otomatik rekorlar başta su olmak üzere her türlü kimyasal sıvının geçebilmesine olanak sağlamaktadır.



Valf Sistemi	Pimli
Malzeme	Alüminyum
Vida Ölçüsü	BSP (İsteğe Bağlı: Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Takma Sistemi	Yüzük geri çekilerek
Çıkarma Sistemi	Yüzük geri çekilerek
Basınç Altında Takılabilme	Yapılamaz
Basınç Altında Çıkarılabilme	Yapılamaz
Özel Hallerde	VİTON & Isıya dayanıklı özel yay (-30 °C ile +225 °C), Poliüretan (PU)
Kullanım Alanı	Havacılık, inşaat, üretim, savunma, mobil hidrolik



QCHT SERIES SPECIAL PURPOSE HIGH TECHNOLOGY ALUMINIUM QUICK COUPLINGS

QCHT series Fer-ro Quick Couplings made of high-quality aluminium material for high-tech products allow to pass all kinds of chemical liquids especially water.



Shut-off System	Poppet Valve
Material	Aluminium
Thread Size	BSP (Upon Request: Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Connection System	Pulling back the sleeve
Disconnection System	Pulling back the sleeve
Connection Under Pressure	Not Allowed
Disconnection Under Pressure	Not Allowed
Upon Request	VITON & High temperature resistant special spring (-30 °C & +225 °C), Polyurethane (PU)
Applications	Aviation, construction, production, national defense, mobile hydraulic



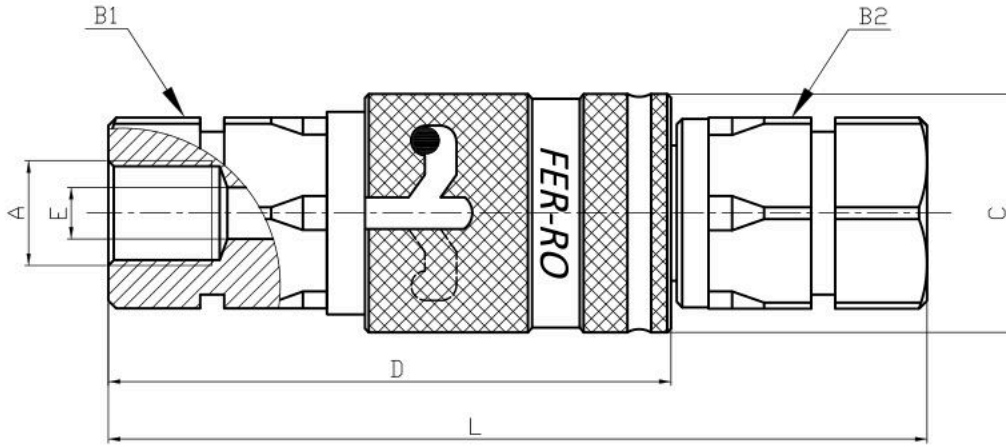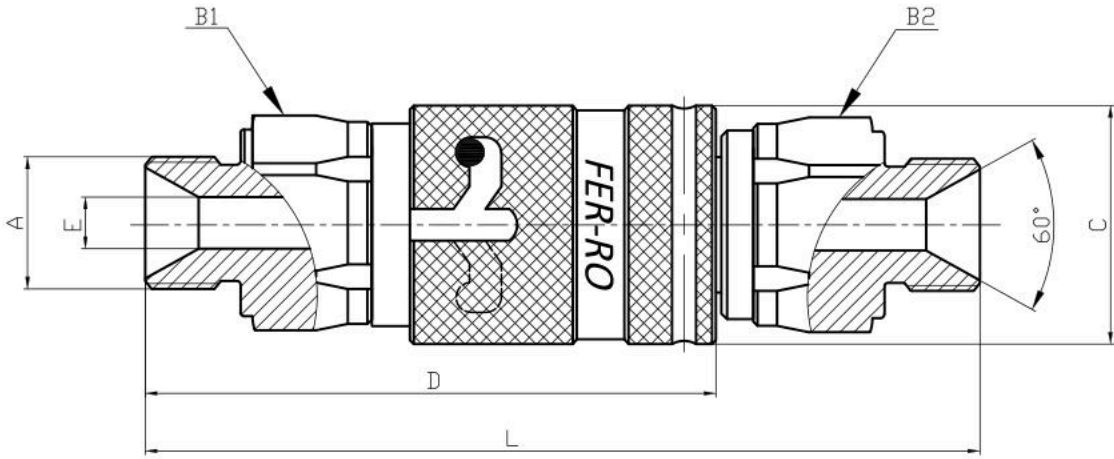

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) A	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm					
			B1	B2	C	D	E	L
QCHTG14SN	1/4" BSP	160	AA24	AA24	30	71	6	103
QCHTG38SN	3/8" BSP	160	AA24	AA24	30	71	6.50	103
QCHTN14SN	1/4" NPTF	160	AA24	AA24	30	71	6	103
QCHTN38SN	3/8" NPTF	160	AA24	AA24	30	71	6.50	103
QCHTG14MSN	1/4" BSP	160	AA24	AA24	30	72	6	105
QCHTG38MSN	3/8" BSP	160	AA24	AA24	30	72	6.50	105