



TAB SERİSİ TIR DORSE OTOMATİK FREN HAVA KAPLINLERİ

Metrik vida ölçüsüne sahip olan TAB Serisi TIR Dorse Otomatik Fren Hava Kaplinlerinde Çelik ve Alüminyum olarak iki farklı tipte gövde üretimi mevcuttur. TAB Serisi'nde erkek uçlar ısıtılarak sertleştirilmiştir.

Valf Sistemi

Malzeme

Vida Ölçüsü

Sızdırmazlık

Çalışma Sıcaklığı

Kaplama

İşil İşlem

Takma Sistemi

Çıkarma Sistemi

Basınç Altında Takılabilme

Basınç Altında Çıkarılabilme

Kullanım Alanı

Pimli

Otomat çeliği / Alüminyum

Metrik

Nitril O-ring (NBR)

-30 °C ile +110 °C

Galvaniz (Chrome III pasivasyon)

Otomatik Erkek Rekor

Yüzük geri çekilerek

Yüzük geri çekilerek

Yapılamaz

Yapılamaz

Otomotiv, taşımacılık, TIR'ların fren hava sistemleri

TAB SERIES SEMI-TRAILER AIR BRAKE QUICK COUPLINGS

Carbon steel or aluminium types are available for TAB Series Semi-Trailer Air Brake Quick Couplings. Male nipples of TAB Series Quick Couplings are hardened by heat treatment.

Shut-off System

Material

Thread Size

Sealing

Working Temperature

Plating

Heat Treatment

Connection System

Disconnection System

Connection Under Pressure

Disconnection Under Pressure

Applications

Poppet Valve

Carbon Steel / Aluminium

Metric

Nitrile O-ring (NBR)

-30 °C and +110 °C

Zinc Plating (Cr III Passivation)

Male nipple


Pulling back the sleeve


Pulling back the sleeve

Pressure Not Allowed

Not Allowed

Automotive, transportation, air brake system of semi-trailers.

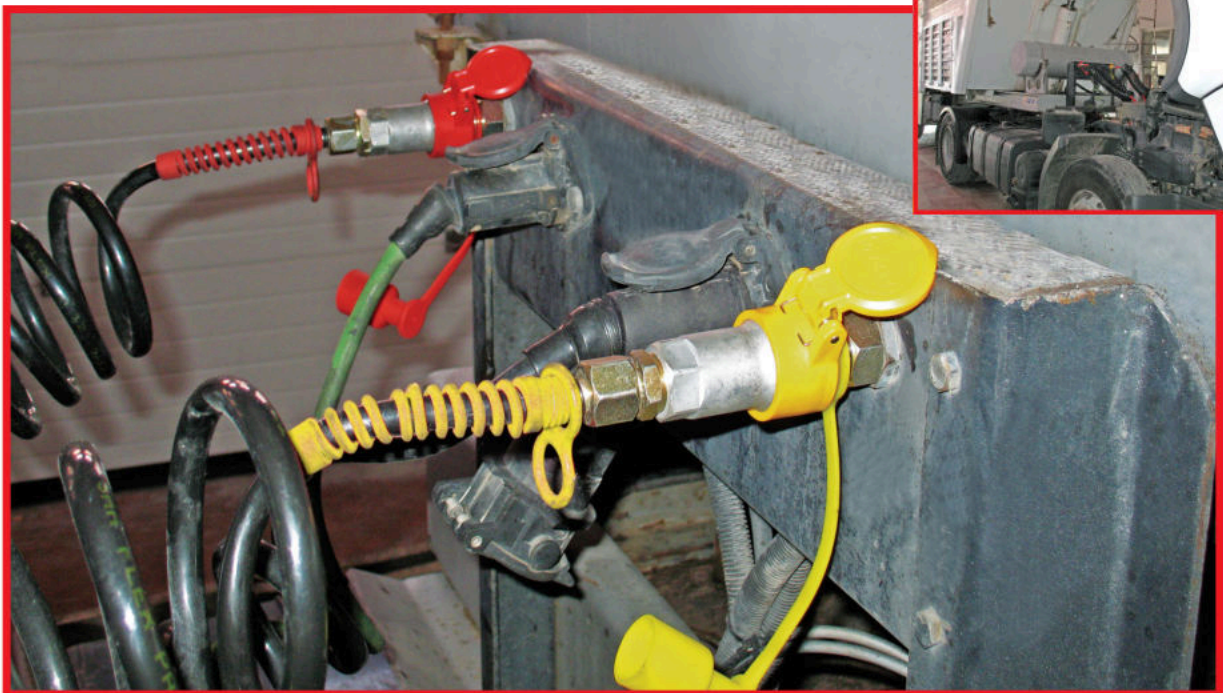

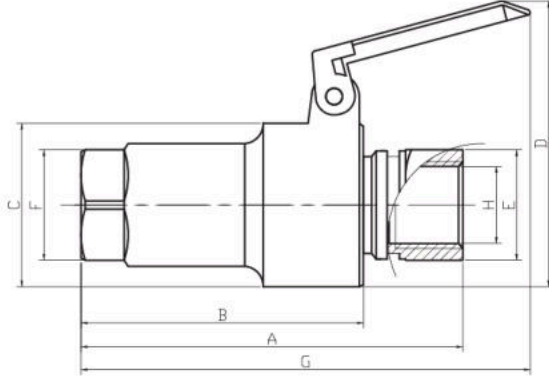


(ÇELİK)

Teknik Özellikler
Technical Specifications

(CARBON STEEL)

Kod (Code)	Renk (Color)	Vida Ölçüsü (Thread Size) H	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm						
				A	B	C	D	E	F	G
TABSYACM2215SN	SARI / YELLOW	M22x1.5	320	92	70	42	72	27	30	110
TABSRACM2215SN	KIRMIZI / RED	M22x1.5	320	92	70	42	72	27	30	110
TABSYACM1615SN	SARI / YELLOW	M16x1.5	320	92	70	42	72	27	30	110
TABSRACM1615SN	KIRMIZI / RED	M16x1.5	320	92	70	42	72	27	30	110

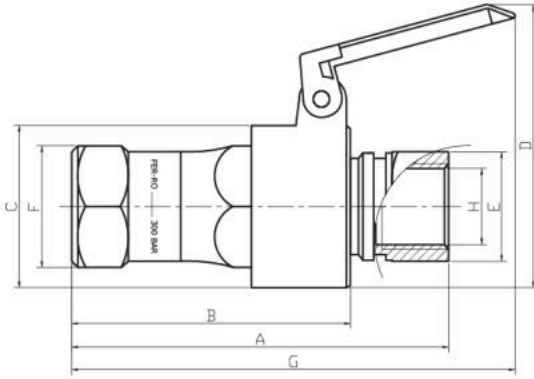


ESKİ YÖNTEMLERE SON!
NO MORE OLD TECHNIQUES!

(ALÜMİNYUM)

Teknik Özellikler
Technical Specifications

(ALUMINIUM)


Kod (Code)	Renk (Color)	Vida Ölçüsü (Thread Size)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm						
				A	B	C	D	E	F	G
TABAYACM2215SN	SARI / YELLOW	M22x1.5	300	92	70	42	72	27	27	110
TABARACM2215SN	KIRMIZI / RED	M22x1.5	300	92	70	42	72	27	27	110
TABAYACM1615SN	SARI / YELLOW	M16x1.5	300	92	70	42	72	27	27	110
TABARACM1615SN	KIRMIZI / RED	M16x1.5	300	92	70	42	72	27	27	110

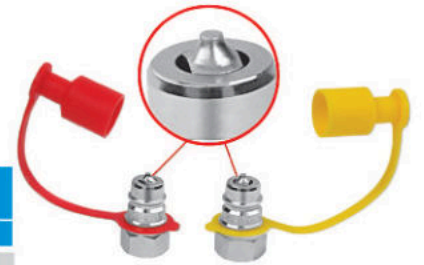

"Faydalı model patenti firmamıza aittir."
"Utility model patented."

* Dişi gövdeler Alüminyum, Erkek uçlar otomat çeliğidir.
*Female bodies are aluminium, male nipples are carbon steel

75

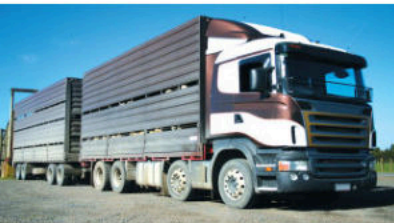

FER-RO / TAB SERİSİ TIR DORSE OTOMATİK FREN HAVA KAPLINLARI
FER-RO / TAB SERIES SEMI-TRAILER AIR BRAKE QUICK COUPLINGS