



PRD SERİSİ BASINÇ DÜŞÜRÜCÜ VALF (KARTRİÇ TİP)

Basınç Düşürücü Valf (Kartriç Tip), hidrolik sistemlerin farklı bölümlerinde daha düşük basınçları elde etmeye yardımcı olur. Pompa üzerindeki basıncı sabit tutarken hat üzerindeki basıncı düşürmeyi sağlar. Basınç Düşürücü Valf (Kartriç Tip) ana pompa hattına bağlı alt hattın daha düşük basınçta çalışmasını sağlar. Bu valfler pilot uyarılı çalışma sistemine sahiptirler.




Malzeme	Otomat Çeliği
Vida Ölçüsü	Metrik
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III Pasivasyon)
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları

PRD SERIES PRESSURE REDUCER VALVE (CARTRIDGE TYPE)

Pressure Reducer Valve (Cartridge Type) helps to achieve lower pressures in different parts of hydraulic systems. It allows you to reduce the pressure on the line while keeping the pressure on the pump constant. Pressure Reducer Valve (Cartridge Type) allows the lower line connected to the main pump line to operate at lower pressure. These valves have pilot-operated working principle.

Material	Carbon Steel
Thread Size	Metric
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Heat Treatment	Internal parts
Applications	General Hydraulic Applications



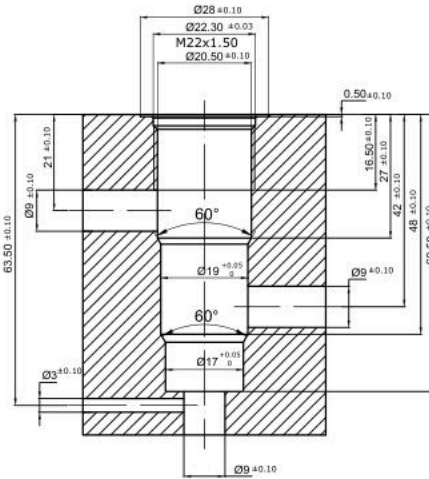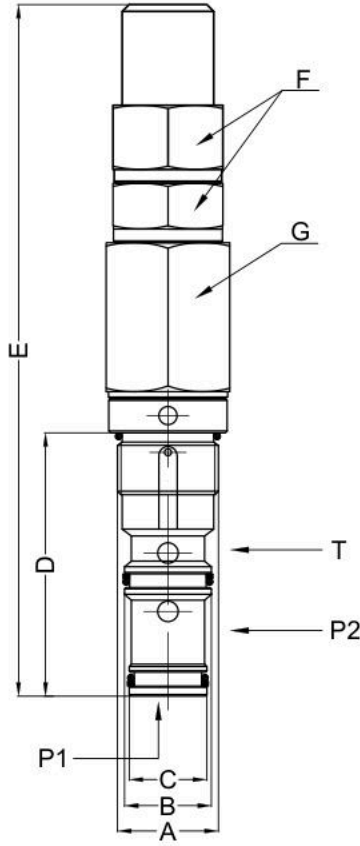

Teknik Özellikler Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) lt/min	Max. Ayarlanabilir Basınç (Max. Set Pressure)	Ölçüler - mm (Dimensions - mm)						
				A	B	C	D	E	F	G
PRDCRTM2215N	350	40	210	M22x1.5	Ø18.95	Ø16.95	57.50	151	AA24	AA27

