



QCBRFFMP SERİSİ ENDÜSTRİYEL ÇOK AMAÇLI KULLANIM OTOMATİK REKORLAR PİRİNÇ - İÇİ BOŞ - DIŞI UÇ

QCBRFFMP SERIES INDUSTRIAL MULTI PURPOSE QUICK COUPLINGS-BRASS-FREE FLOW - FEMALE NIPPLE



QCBRFFMP SERİSİ ENDÜSTRİYEL ÇOK AMAÇLI KULLANIM OTOMATİK REKORLAR PİRİNÇ - İÇİ BOŞ - ERKEK UÇ

QCBRFFMP SERIES INDUSTRIAL MULTI PURPOSE QUICK COUPLINGS-BRASS-FREE FLOW - MALE NIPPLE



QCBRFFMP SERİSİ ENDÜSTRİYEL ÇOK AMAÇLI KULLANIM OTOMATİK REKORLAR PİRİNÇ - İÇİ BOŞ - HORTUM UÇ

QCBRFFMP SERIES INDUSTRIAL MULTI PURPOSE QUICK COUPLINGS-BRASS-FREE FLOW - HOSE NIPPLE



QCBRFFMP SERİSİ ENDÜSTRİYEL ÇOK AMAÇLI KULLANIM OTOMATİK REKORLAR PİRİNÇ- İÇİ BOŞ UÇ ÇEŞİTLERİ

Uç malzemesi pirinç olan QCBRFFMP serisi Endüstriyel Çok Amaçlı Kullanım Otomatik Rekorlar başta su olmak üzere birçok kimyasal sıvının geçebilmesine olanak vermektedir.



Malzeme	Pirinç
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Hortum Bağlantı	Hortum Gövdelerinde
Sızdırmazlık	-30 °C ile +110 °C
Takma Sistemi	Yüzük geri çekilerek
Çıkarma Sistemi	Yüzük geri çekilerek
Basınç Altında Takılabilme	Yapılamaz
Basınç Altında Çıkarılabilme	Yapılamaz
Özel Hallerde	VİTON, EPDM (Buhar uygulamalarına özel), Poliüretan (PU), Silikon (MVQ)
Kullanım Alanı	Denizcilik, gıda, ilaç, medikal, kimya, sulama, kağıt, boya, tekstil, gaz, havacılık

QCBRFFMP SERIES INDUSTRIAL MULTI PURPOSE QUICK COUPLINGS-BRASS-FREE FLOW NIPPLE TYPES

QCBRFFMP Series Industrial Multi Purpose Quick Coupling nipples are made of brass material and allow the pass of water and other many kind of chemical liquids.


Material	Brass
Thread Size	BSP (Upon Request: NPT, Metric)
Hose Connection	Hose Couplers
Working Temperature	-30 °C and +110 °C
Connection System	Pulling back the sleeve
Disconnection System	Pulling back the sleeve
Connection Under Pressure	Not Allowed
Disconnection Under Pressure	Not Allowed
Upon Request	VITON, EPDM (For steam applications), Polyurethane (PU), Silicone (MVQ)
Applications	Marine, food, pharmacy, medical, chemical, irrigation, paper, paint, textile, gas and aviation



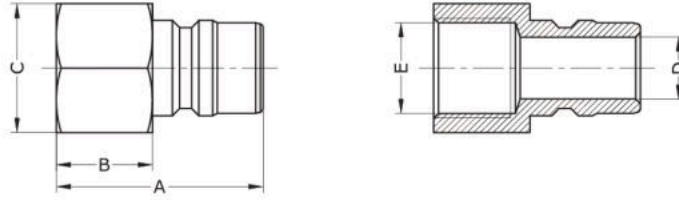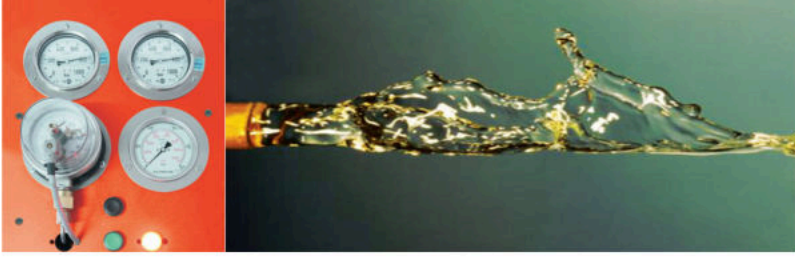


Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) E	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm			
			A	B	C	D
QCBRFFMPG14FN	1/4" BSP	250	36	17	17	6,50
QCBRFFMPG38FN	3/8" BSP	230	38	17	22	10
QCBRFFMPG12FN	1/2" BSP	220	43	20	27	13
QCBRFFMPG34FN	3/4" BSP	180	52	23	32	17
QCBRFFMPG1FN	1" BSP	150	59	25	41	24
QCBRFFMPG114FN	1 1/4" BSP	130	64	27	50	31
QCBRFFMPG112FN	1 1/2" BSP	100	76	30	60	36
QCBRFFMPG2FN	2" BSP	80	83	32	70	50

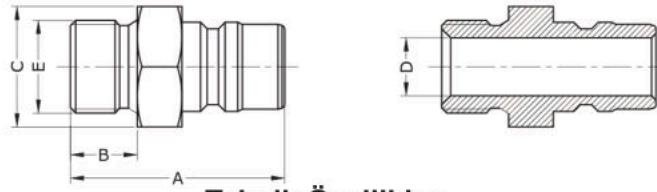

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) E	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm			
			A	B	C	D
QCBRFFMPG14MN	1/4" BSP	250	38	12	17	6,50
QCBRFFMPG38MN	3/8" BSP	230	40	12	22	10
QCBRFFMPG12MN	1/2" BSP	220	48	15	27	13
QCBRFFMPG34MN	3/4" BSP	180	57	16	32	17
QCBRFFMPG1MN	1" BSP	150	68	19	41	24
QCBRFFMPG114MN	1 1/4" BSP	130	72	20	50	31
QCBRFFMPG112MN	1 1/2" BSP	100	86	22	60	36
QCBRFFMPG2MN	2" BSP	80	108	25	70	50

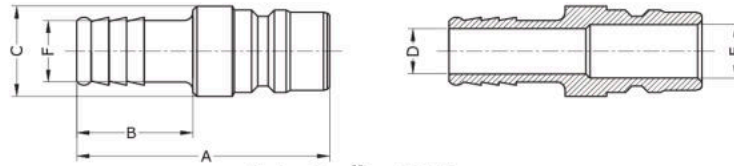

Teknik Özellikler Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) F	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm				
			A	B	C	D	E
QCBRFFMP8HN	ø8 MM	250	44	20	13	5	6,50
QCBRFFMP11HN	ø11 MM	230	52	26	15.50	7	10
QCBRFFMP15HN	ø15 MM	220	61	28	21.50	11	13
QCBRFFMP21HN	ø21 MM	180	77	38	26	15	15
QCBRFFMP27HN	ø27 MM	150	95	47	34.50	22	24
QCBRFFMP32HN	ø32 MM	130	104	53	41.50	26	31
QCBRFFMP41HN	ø41 MM	100	128	70	49.50	32	36
QCBRFFMP50HN	ø50 MM	80	141	75	64	43	48