

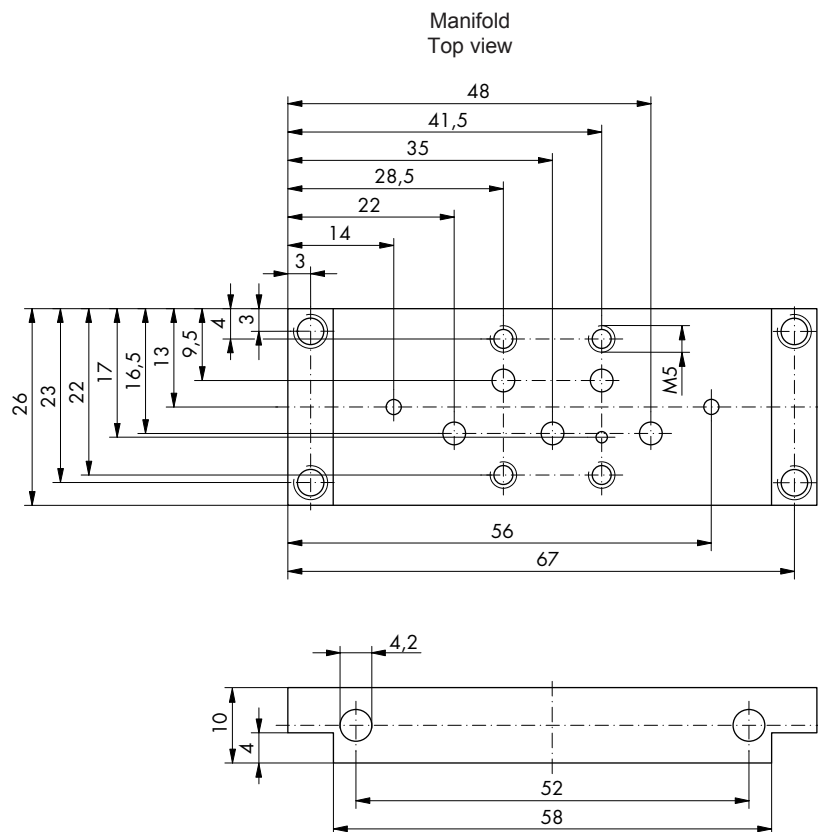
Manifolds & Subplates

84 Series Subplate Single Valve Subplate

Minimum order quantities may apply.

Description	Order code
Single manifold M5 bottom ported	84.402.01

Dimensional drawings



All accessories are included to complete your manifold including banjo screws and washers.

For use with the following valve types:

84.212/84.214

Miniature Pneumatic Valves

Kuhnke 84 Series Valve - 5/2 Way Manifold Mounting



Technical information

Pressure range:	0-10 bar
Temperature range:	-10°C...+70°C
Housing:	Aluminium alloy/Zinc alloy/Makrolon
Spool & liner:	Steel, corrosion resistant
Lubricant:	Not required
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.

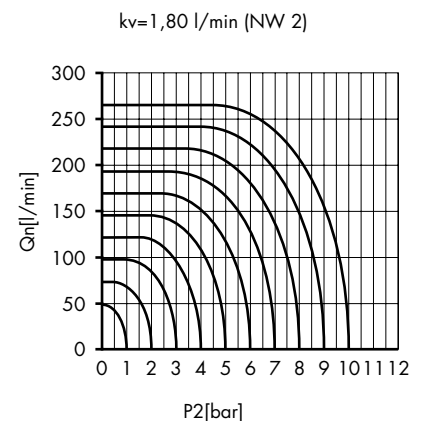
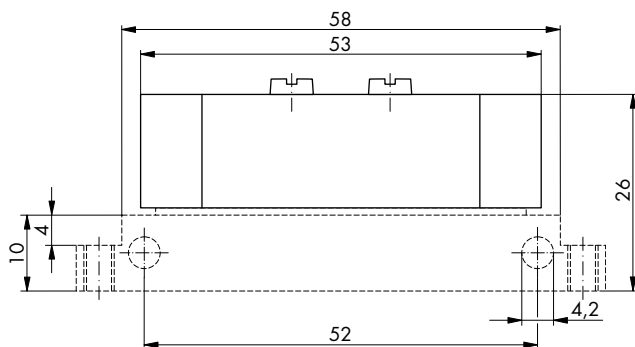


Other information

Subplates are available for this product, please see data sheet M1011.

Symbol	Description	Type	Orifice	Order code
	5/2 way pilot spring return	Spool	2mm	84.212
	5/2 way double pilot	Spool	2mm	84.214

Dimensional drawings



Miniature Solenoid Valves

Kuhnke 84 Series Valve - 5/2 Way Manifold Mounting

Technical information

Pressure range:	2-8 bar
Temperature range:	-10°C...+50°C
Duty cycle:	Continuous 100%
Housing:	Aluminium alloy/Zinc alloy/Makrolon
Spool & liner:	Steel, corrosion resistant
Lubricant:	Not required.
Earthing contact:	Part of the standard device.
Operating medium:	5 micron filtered, lubricated or non-lubricated compressed air.



Other information

Insert coil voltage required to complete the order code, example 84.240.01 24VDC.

Standard voltages are 12 and 24 VDC: 24, 110 and 230 VAC.

Order connecting plugs separately, part number 64.230.01.

Subplates are available for this product, see data sheet M1011.

Symbol	Description	Coil Power	Type	Orifice	Order code
	5/2 way single solenoid spring return DC coil	1.8 W	Spool	2mm	84.240.01
	5/2 way single solenoid spring return AC coil	5.5 VA	Spool	2mm	84.240.02
	5/2 way double solenoid DC coil	1.8 W	Spool	2mm	84.244.01
	5/2 way double solenoid AC coil	5.5 VA	Spool	2mm	84.244.02

Dimensional drawings

